





LED High Bay Light

Installation Instructions

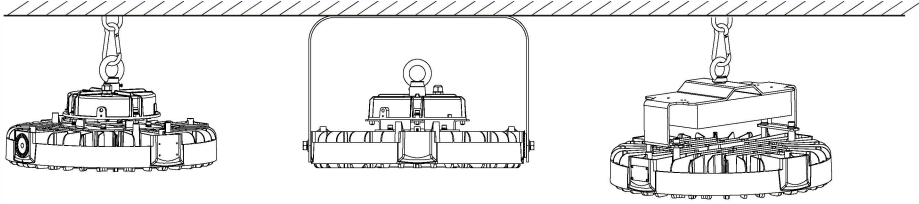


Physical Dimensions

100-277VAC





480W(120-277VAC)



Unit: mm/inch

	300W	480W	600W
A	450(17.70")	450(17.70")	450(17.70")
B	213(8.37")	230(9.05")	260(10.22")
C	30(1.18")	34(1.34")	30(1.18")

277-480VAC



Unit: mm/inch


	300W	480W	600W
A	450(17.70")	450(17.70")	450(17.70")
B	260(10.22")	260(10.22")	260(10.22")
C	30(1.18")	30(1.18")	30(1.18")

Power	300W	480W	600W
Input Voltage	100-277VAC / 120-277VAC / 277-480VAC		
Power Frequency	50/60 Hz		
Outlook Dimensions (100-277VAC)	Ø450x213mm(Ø17.70"x8.37")	Ø450x230mm(Ø17.70"x9.05")	Ø450x260mm(Ø17.70"x10.22")
Luminaire Net Weight(100-277VAC)	9.2±0.3kg(20.28±0.66Lbs)	10.6±0.3kg(23.37±0.66Lbs)	12.9±0.3kg(28.44±0.66Lbs)
Working Temperature (100-277VAC)	-30°C to +50°C(-22°F to +122°F)		-30°C to +45°C(-22°F to +113°F)
Outlook Dimensions (277V-480VAC)	Ø450x260mm(Ø17.70"x10.22")		
Luminaire Net Weight(277V-480VAC)	10.9±0.3kg(24.03±0.66Lbs)	10.6±0.3kg(23.37±0.66Lbs)	12.9±0.3kg(28.44±0.66Lbs)
Working Temperature (277-480VAC)	-30°C to +50°C(-22°F to +122°F)		-30°C to +45°C(-22°F to +113°F)
Storing Temperature	-40°C to +70°C(-40°F to +158°F)		


Suspension Mount

1. ✕

Recommended Hook Size: Ø10x100mm




2. ✕

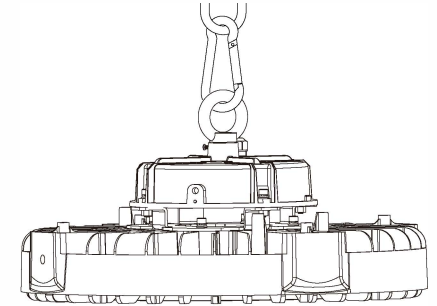


Ceiling Mount (Unit: mm/inch)


1. ✕

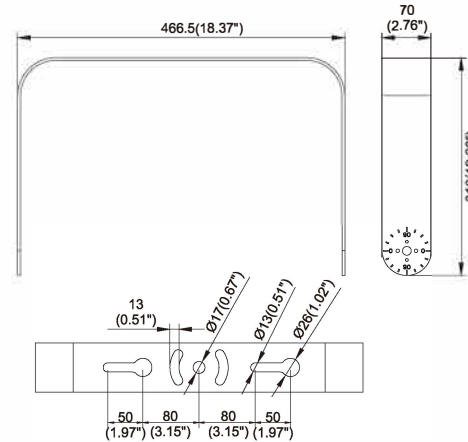


1. ✕

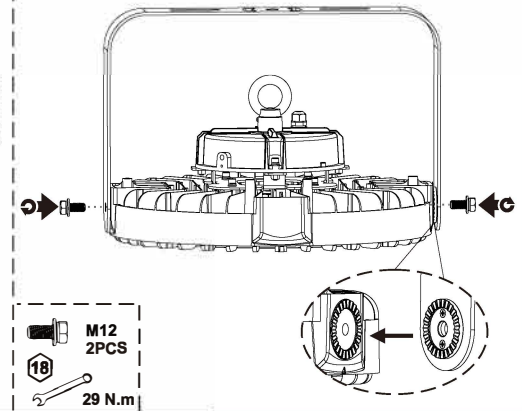



2. ✕

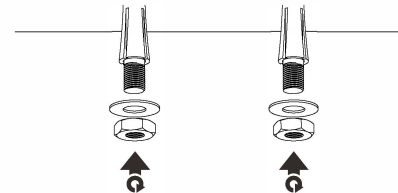

3. ✕

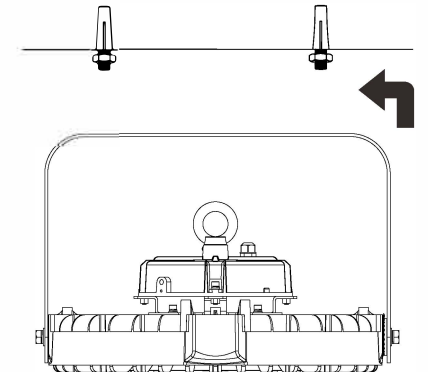


4. ✕

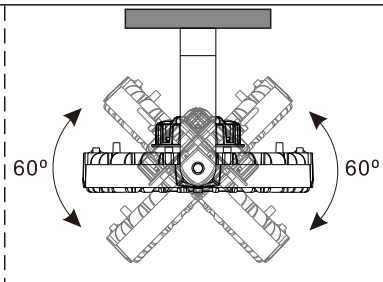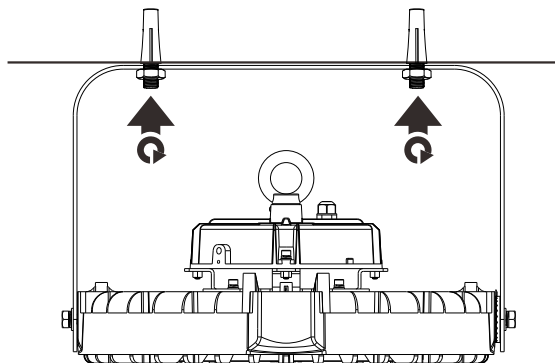


Safety Rope Installation

1. ✕

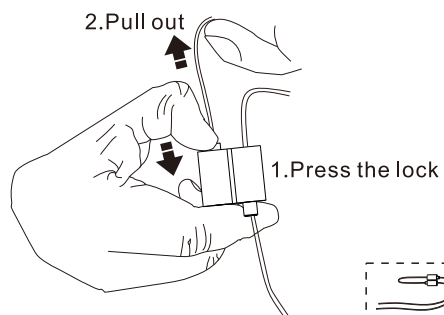


2. ✕

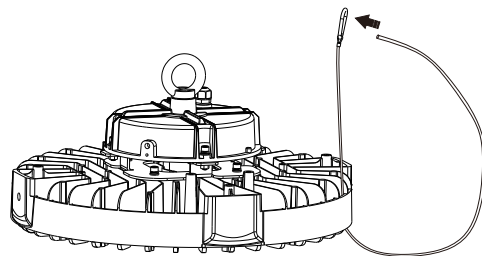

2 PCS


3. ✕

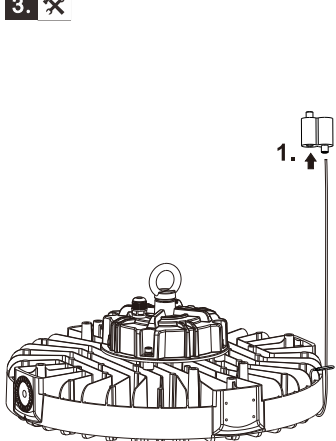

2.



4. ✕

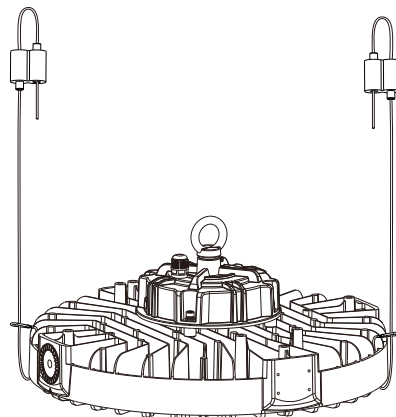

AC cords

L	brown		black
N	blue		white
⊕	yellow/green		green

DIM cords

Note: color for dim cords subject to the cable label on luminaire



Warning! do not wire dim cord to high voltage, or dim function will fail.

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- For type Y attachments:
if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.